

## Hitouch 4

CP17-60HT

### 355-375W

### BIFACIAL

High Efficiency Module

### 20.60%

Maximum Efficiency

### 15 YEARS

Product Warranty



#### Higher Power Output

Higher module conversion efficiency benefit from bigger wafer and half-cell structure.

MBB technology enhances current collection with lower series resistance.



#### Excellent Temperature Coefficient

Lower operating temperature and temperature coefficient increases the power output



#### Long-Term Reliability

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal).

Excellent anti-PID performance to guarantee a better sustainability in harsh environment.




#### Lower Hot Spot and Crack Risk

Reduce hot-spot risk with optimized electrical design and lower operating current.

Reduce crack risk by MBB solar cell design.

#### Power Warranty

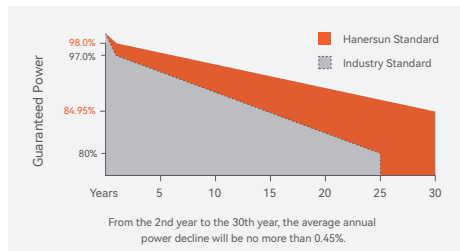

15-year product warranty



30-year linear power output warranty

#### Insurance



Munich RE



太平洋保险 CPIC

#### Certificates



#### About Hanersun

Hanersun is a world leading solar module manufacturer and comprehensive energy solution provider. We provide customers with cutting edge solar modules, and services for the entire project life cycle.

## Electrical Characteristics

Module Type	CP17-60HT355W		CP17-60HT360W		CP17-60TH365W		CP17-60HT370W		CP17-60HT375W	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax)	355	265	360	268	365	272	370	276	375	280
Maximum Power Voltage (Vmp)	33.70	31.40	33.90	31.60	34.10	31.80	34.30	32.00	34.50	32.20
Maximum Power Current (Imp)	10.52	8.44	10.60	8.51	10.69	8.57	10.77	8.63	10.85	8.69
Open-circuit Voltage (Voc)	39.20	37.0	39.40	37.90	39.60	38.10	39.80	38.30	41.00	38.50
Short-circuit Current (Isc)	11.26	9.14	11.37	9.20	11.44	9.26	11.45	9.32	11.61	9.38
Module Efficiency(%)	19.50%		19.70%		20.00%		20.30%		20.60%	

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.  
\*Measuring tolerance: 0 ~ +5W

NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

## Electrical Characteristics with 10% Solar Irradiation Ratio

Module Type	CP17-60HT355W	CP17-60HT360W	CP17-60TH365W	CP17-60HT370W	CP17-60HT375W
Maximum Power (Pmax)	390	395	400	406	411
Maximum Power Voltage (Vmp)	33.70	33.90	34.10	34.30	34.50
Maximum Power Current (Imp)	11.57	11.68	11.75	11.86	11.94
Open-circuit Voltage (Voc)	39.20	39.40	39.60	39.80	40.00
Short-circuit Current (Isc)	12.40	12.50	12.55	12.59	12.70

## Mechanical Parameters

Solar Cells	Monocrystalline (166mm)
Module Dimensions	1755*1038*30mm
Glass	2mm-2mm
Frame	Anodized Aluminium Alloy
Output Cable	4.0mm <sup>2</sup> , 300/300mm

No. of Cells	120 [2 x (10 x 6) ]
Weight	22.2kg
Encapsulant Material	EVA/POE
J-Box	IP68
Connector	MC4 Compatible

## Temperature Ratings

NMOT (Nominal operating cell temperature)	44°C(±2°C)
Temperature Coefficient of Pmax	-0.260%/°C
Temperature Coefficient of Voc	-0.240%/°C
Temperature Coefficient of Isc	+0.040%/°C

(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)

## Packaging


Pcs per Pallet: 36

## Operating Parameters


Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC (IEC)
Maximum Series Fuse Rating	25A
Bifacility	80%

Pcs per 40' HC: 936


## I-V Curves of PV Module (370W)

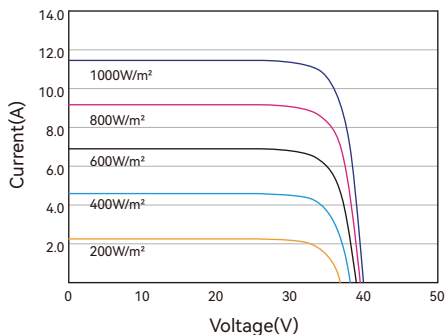


## P-V Curves of PV Module (370W)

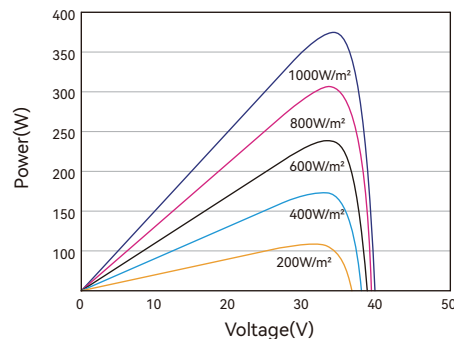

## Dimensions (Unit: mm)

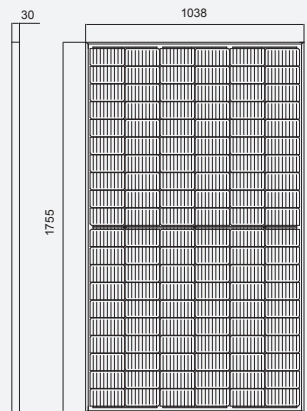

Front View

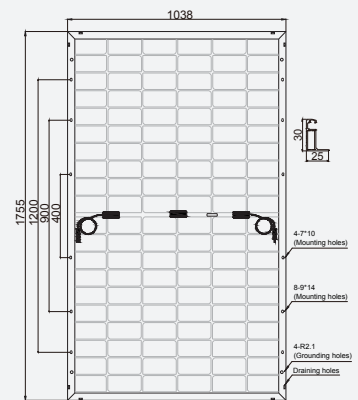

Back View